

VTO2000A-S1 IP Villa Outdoor Station



Features

- HD CMOS camera
- Stainless steel panel, IP54, IK07
- Night vision &Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted & Flush mounted




Technical Specification	
Model	VTO2000A-S1
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	2.8mm
Angle of View	D:120° H:90°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Operation Mode	
Keypad	Single Mechanical Button
Interface	
Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless Steel
Power	DC 12V
Power Consumption	Work ≤10W
Working Temperature	-30°C to +60°C
Relative Humidity	10%RH-90%RH
Dimensions	129.9mm×32.2mm×140mm
Weight	0.8kg


VTO2000A-S1

Dimensions

View Area

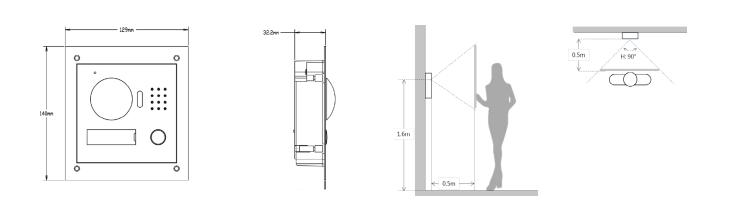

Application

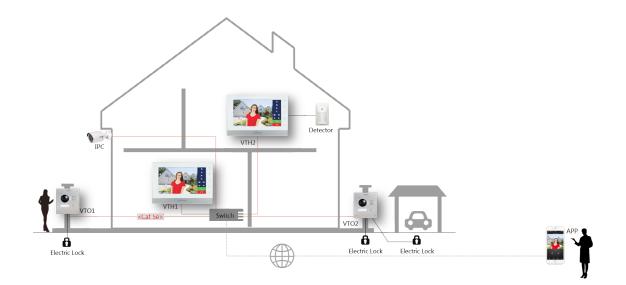



Rev 001.001 © 2019 Dahua . All rights reserved. Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.