

VTO1210B-X-S1

Apartment Outdoor Station



Technical Specification

| • | |
|-----------------------|-------------------------------------|
| Model | VT01210B-X-S1 |
| System | |
| Main Processor | Embedded Micro Processor |
| Operation System | Embedded LINUX OS |
| Video | |
| Video Compression | H.264 |
| Image Sensor | 1/2.7" 1.3" CMOS |
| Lens | 4mm |
| Angle of View | D:95° H:75° |
| Day/Night | Color Image |
| Audio | |
| Audio Compression | G.711 |
| Audio Input | Omnidirectional Mic |
| Audio Output | Built-in Speaker |
| Bidirectional Talk | Support Dual-way Bidirectional talk |
| Display | |
| LCD Screen | 3" STN 128x64 |
| Operation Mode | |
| Keypad | Touch Button |
| Reader | Mifare Card |
| Approaching Induction | |
| | |

0.6m

Body approaching


Features

- HD CMOS camera
- Tempered glass panel, IP65
- Night vision & Voice indication
- Local card openning
- Video & Audio messaging
- Flush mounted



| Interface | |
|---------------------|------------------------------------|
| Door Control | 1 |
| Alarm In | 2(1ch unlock button, 1ch feedback) |
| RS485 | 1 |
| Network | |
| Ethernet | 10M/100Mbps |
| Network Protocol | TCP/IP |
| General | |
| Ingress Protection | IP65 |
| Tamper Switch | 1 |
| Installation | Flush |
| Material | Tempered glass |
| Power | DC 12V |
| Power Consumption | Work ≤10W |
| Working Temperature | -30°C to +60°C |
| Relative Humidity | 10%RH-90%RH |
| Dimensions | 150.0mm×408.0mm×46.4mm |
| Weight | 1.6kg |

VTO1210B-X-S1

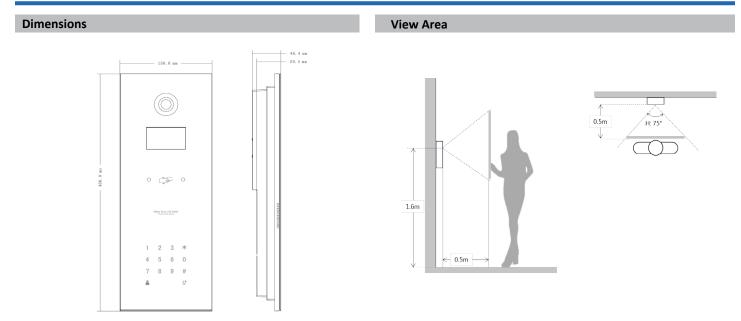

Application





Rev 001.001 © 2019 Dahua . All rights reserved. Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.